

## Scope of Supply/Bill of Material & Mounting Drawings

Part Number: H-CRF300L-02-01-SL / H-CRF300L-02-02

Part Description: Radiator Guard – HONDA CRF300 L


### Installation / Parts List / Bill of Material for Mounting

NO.	Description	Quantity	Torque * (N-M)	Remarks **	Chacklist
1	Radirtor Guard	1			
2	Screw M6x25	2	9-10		
3	Washer M6	2			
4	Rubber Tape	2			
5	Washer M5	1			
6	Screw M5x16	1	5- 6		
7	Hex flange nut gradea M5	1			


SRC Design uses Metric System of Measu rement and all dimensions in Millimeters

\* Recommended to use the Torque specified in the table

\*\* Denotes Usage of Liquid Thread Locker in specified Locations

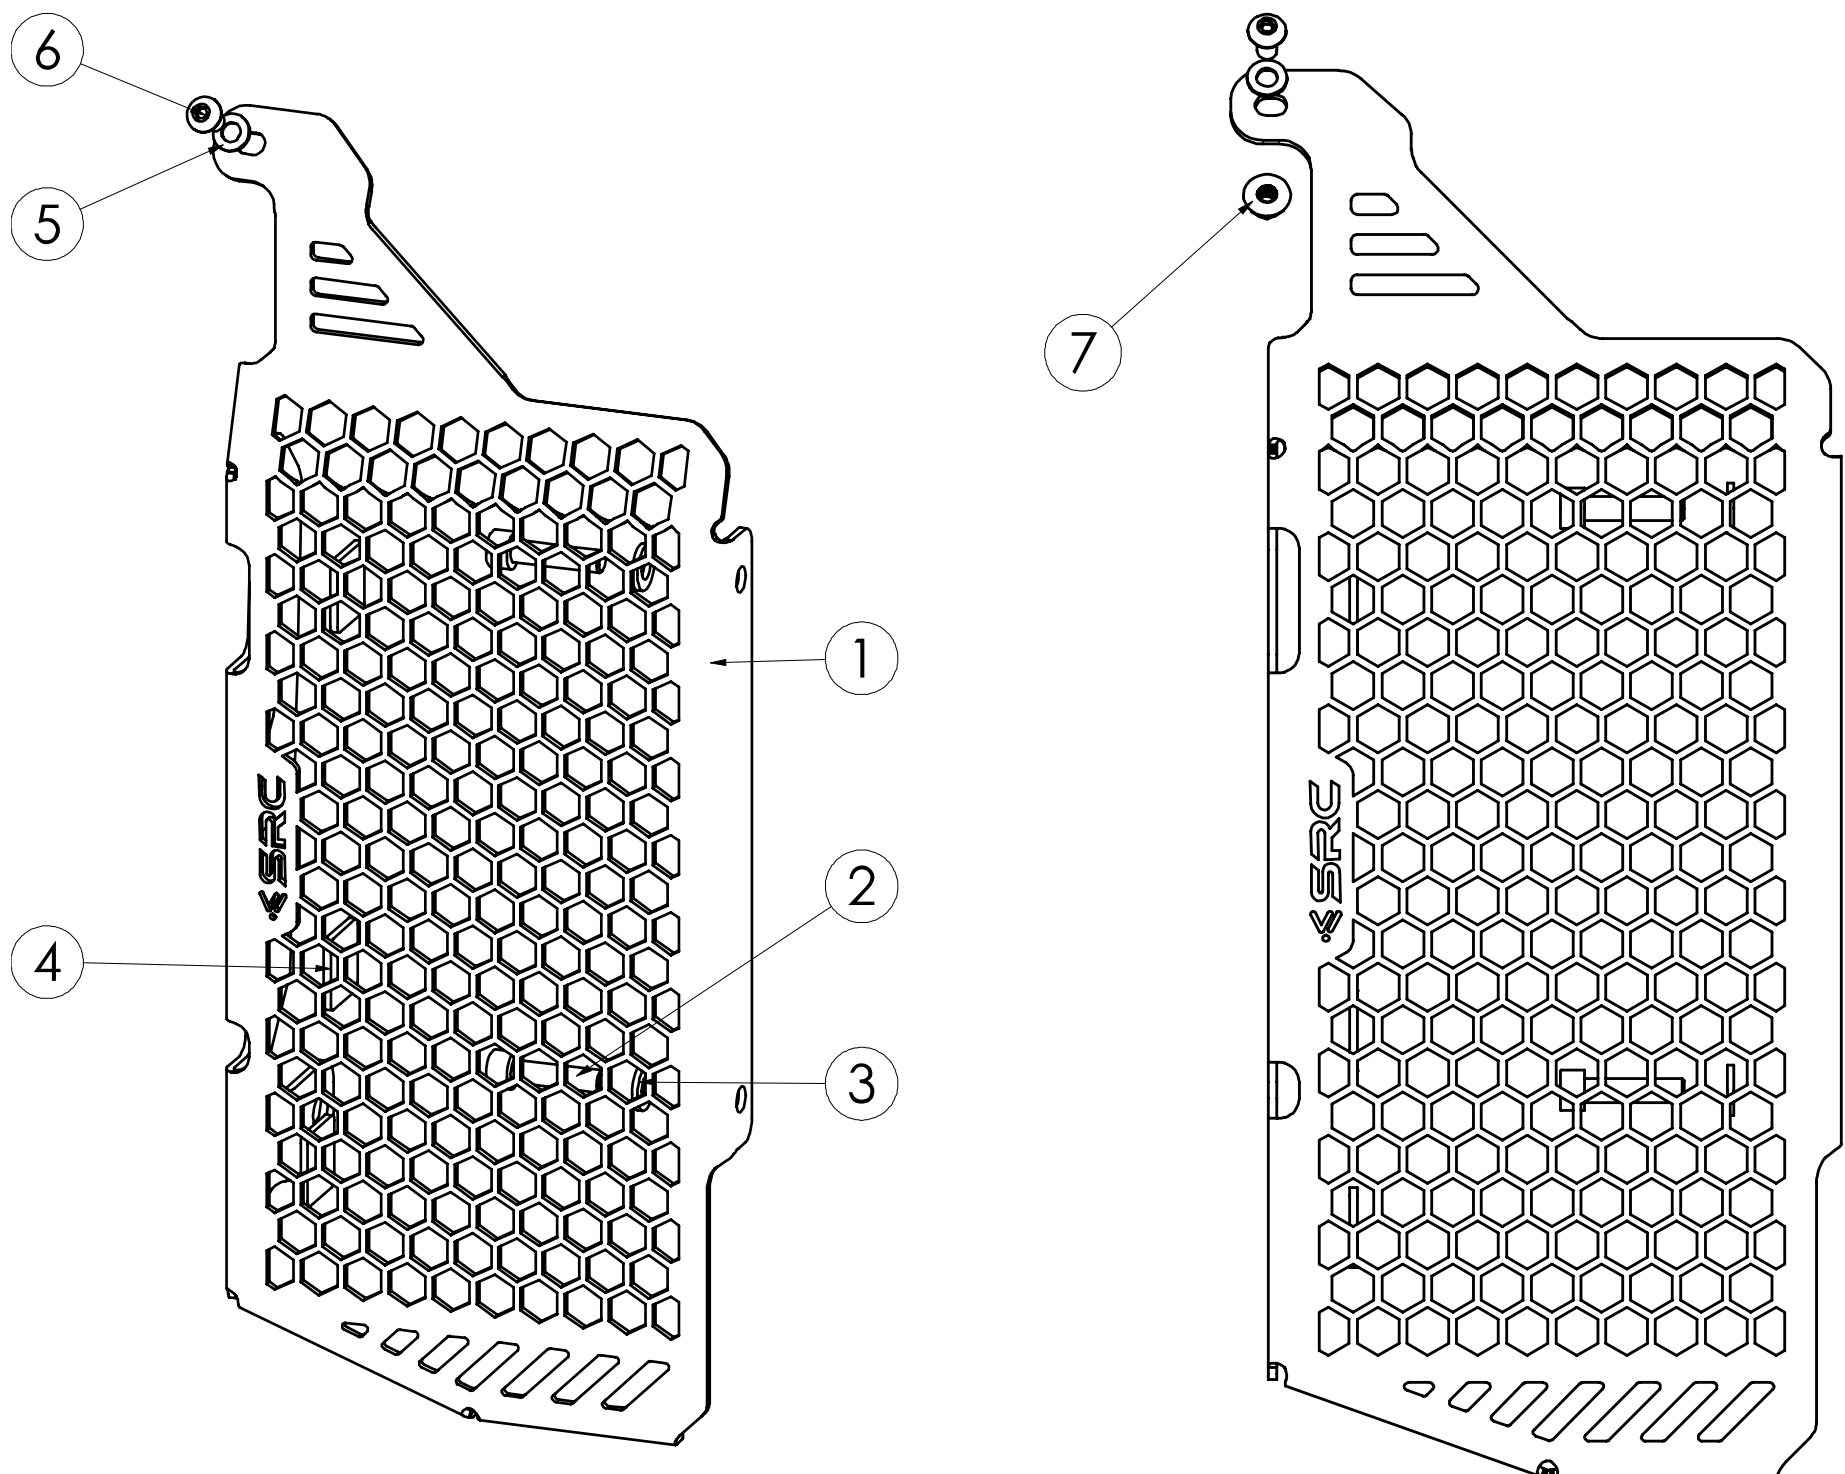

**Mounting Instructions**


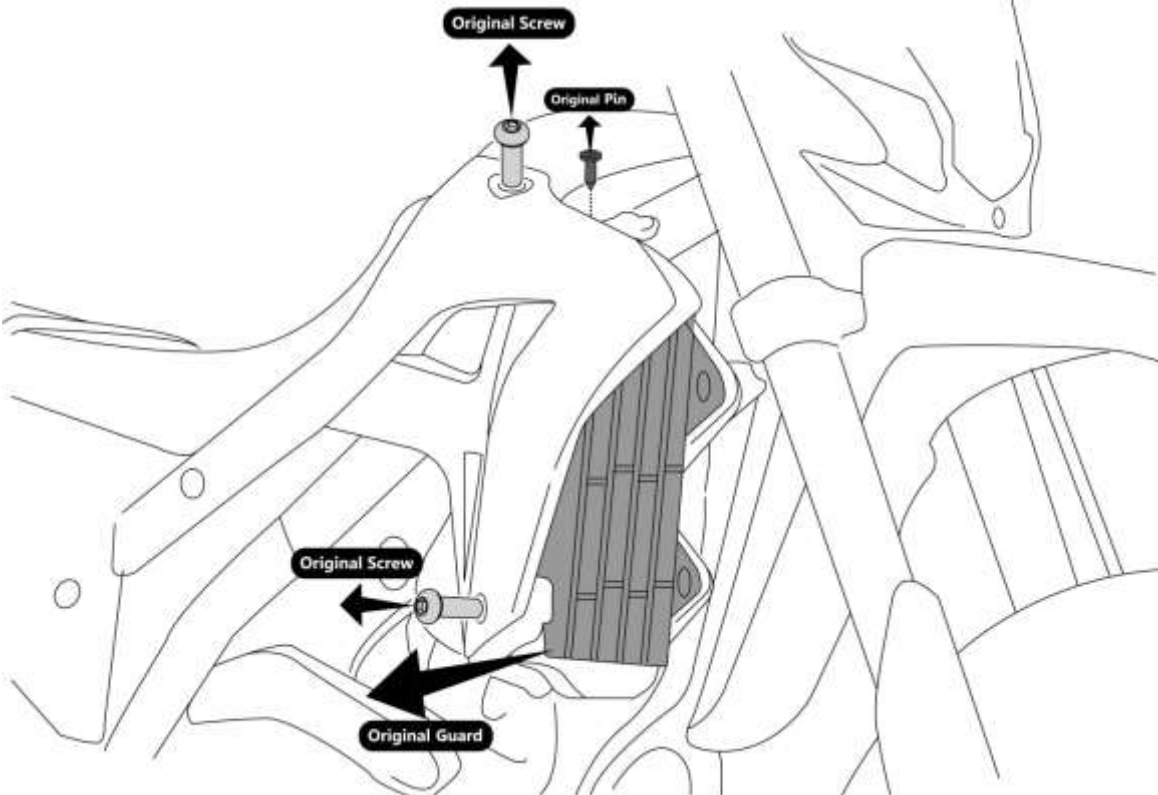


**Step 1:**

**Remove the original screws, pin, and remove the original guard before starting to mount SRC Radiator Guard (as show)**

**Step 2:**

**Orient the Radiator Guard (1) and Slip-in the washer M6 (3)-2 off, Screw M6x25 (2)-2 off, (Shown in “Red” colour), which holds the Radiator to the Chassis frame through and secure the threads, and tighten it fully.**

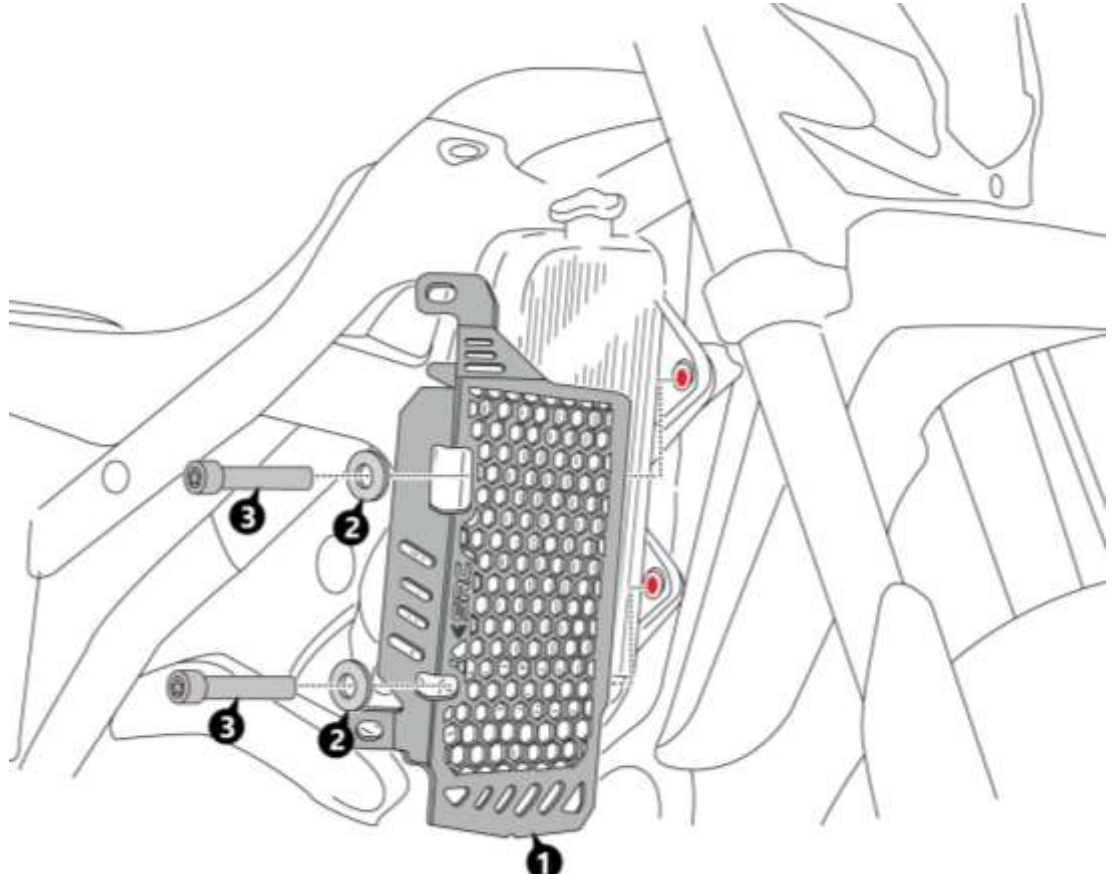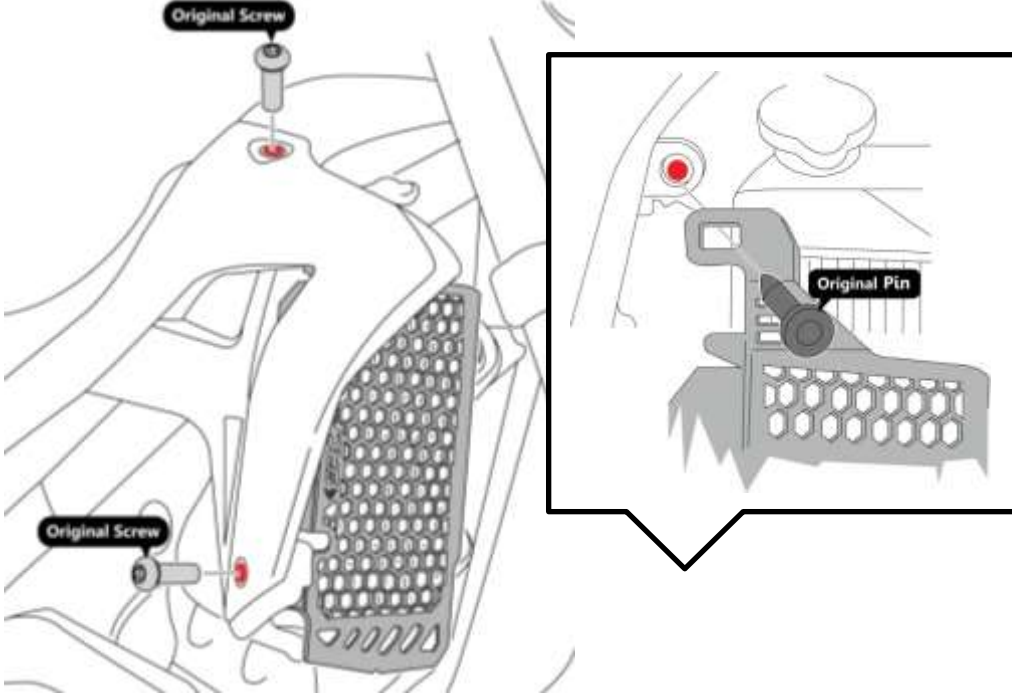**Step 4:**

**Align the Dirt Shield, as shown, in-line with the Mounting holes and slip-in the original Screw and original pin in motorbike (as show) and secure the threads and tighten it fully.**



## General Instructions

1. We request you to pay attention to the Mounting Instructions in this document and follow the step-by-step procedures.
2. This Mounting Instruction manual is a “Do It Yourself” (DIY) fitment manual of the Accessory part to the Vehicle. We have prepared this based on our experience and knowledge, related to the Vehicle, Part and its functional aspects.
3. SRC cannot guarantee the interchangeability of the parts to any other manufacturer’s accessory part. It is advised to the User, to inspect and ensure the original state of all other Vehicle parts.
4. We request you to bear in mind, that the Installed part can change the driving behaviour and/or the stability during driving or any other dynamic conditions.
5. If you have the appropriate tools and another person to assist you in the mounting, it will help.
6. After Completion of the Mounting and before taking on a First ride, Ensure and Check all functions of the Vehicle. It is always advised to check loosening of the fasteners after the first 50 kilo meters of ride and at regular intervals.
7. We are showing here the Scope of Supply/ Installation/Parts list & BOM from SRC
8. To the maximum extent possible, our design use the current Mounting/Fitment of the Original Equipment, so that Installation of these accessories will not affect the Payload or Function of the Vehicle or the Part on which it is mounted to protect it
9. If any additional modifications are to be done, prior to the fitment of the accessories, it will be explicitly specified in the instruction sheets.